ROLLER CONVEYOR
SH 1120
Straight
Not powered

24V

400V

Product description

The unpowered straight roller conveyor enables the diversion of packets by means of gravity.
All materials are non-rusting. Occasional cleaning with water and mild cleaning agents is permissible.

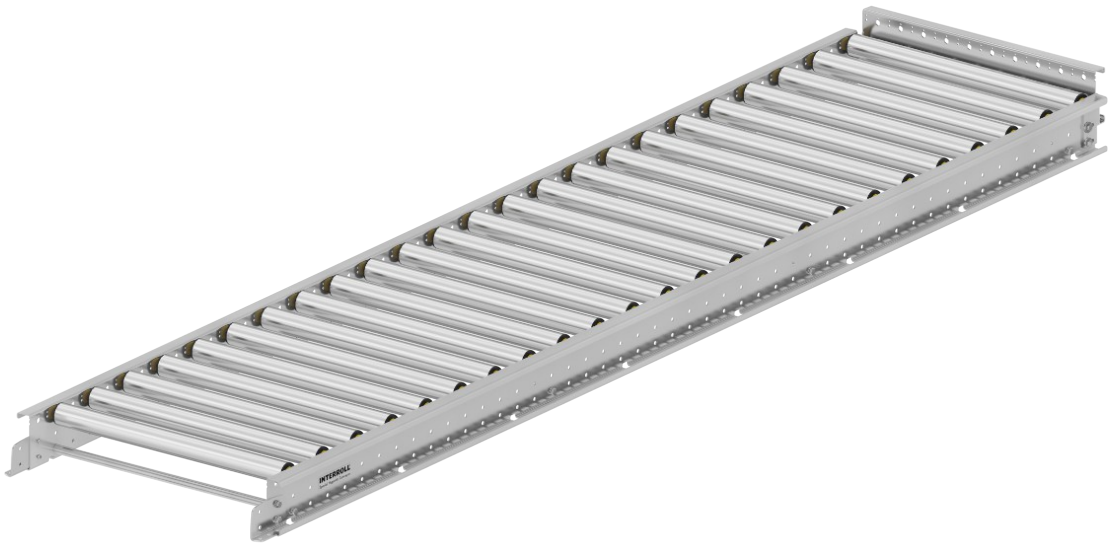

© 10 | 2025 Interroll

ROLLER CONVEYOR
SH 1120
Straight
Not powered

Technical data

General technical data	
Max. load capacity	50 kg/m
Incline/decline	-4 to 0°
Ambient temperature	–5 to +40 °C
Roller	
Roller type	IP55 roller
Roller diameter	50 mm
Roller material	Stainless steel

Dimensions

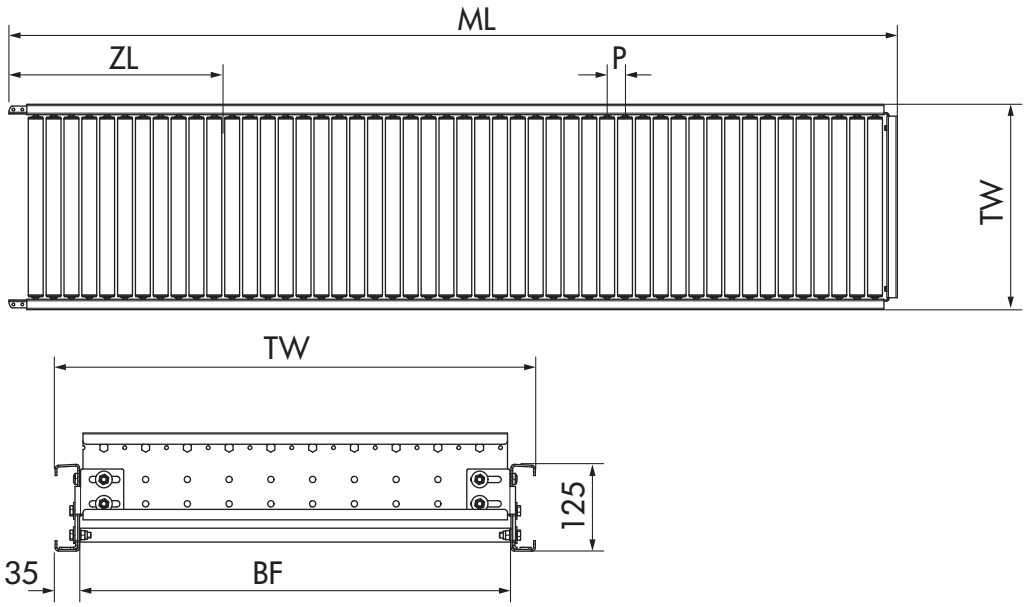

BF	Rated width	420 mm (S), 620 mm (M), 840 mm (L)
	Size of conveying goods	Min. 180 x 180 mm; max. 700 x 800 mm
ML	Module length	420 mm to 2880 mm in 60-mm increments
TW	Module width	BF + 70 mm
P	Roller pitch	60/120 mm