

# BELT CONVEYORS

## BM 8433/8443

Straight  
Center drive + feed



24V

48V

400V

### Product description

The belt conveyor with feed is used for transporting all types of goods on inclines or declines. The feed enables a smooth transition at the lower kink of the belt conveyor, e.g., at the interface with a roller conveyor.

The belt conveyor is available with gear motor (BM 8433) or drum motor (BM 8443).

The design with gear motor (BM 8433) can also be used in the chill area.

### Scope of delivery

- Supply incl. 1 sensor
- Module is completely assembled, maybe split into sections
- Please order supports and end caps separately



# BELT CONVEYORS

## BM 8433/8443

Straight  
Center drive + feed

### Technical data

<b>General technical data</b>	
Max. load capacity*	50 kg/m (standard)
Max. load capacity per module*	550 kg
Conveyor speed*	0.1 to 2.5 m/s (at 50 kg)
Incline/decline	Max. 18°
Ambient temperature	+5 to +40 °C (drum motor); -5 to +40 °C (gear motor)
<b>Drive</b>	
Rated voltage	400 V
Electrical power	Max. 3 kW
Motor type	Drum motor/gear motor
<b>Materials</b>	
Conveyor belt	2-layer, PVC, grooved longitudinally
Slider bed	Zinc-plated sheet steel 2.5 mm Zinc-plated sheet steel 3 mm (from BF = 840 mm)

\*The combination of maximum values is not always possible.

# BELT CONVEYORS

## BM 8433/8443

Straight  
Center drive + feed




24V

48V

400V

### Dimensions

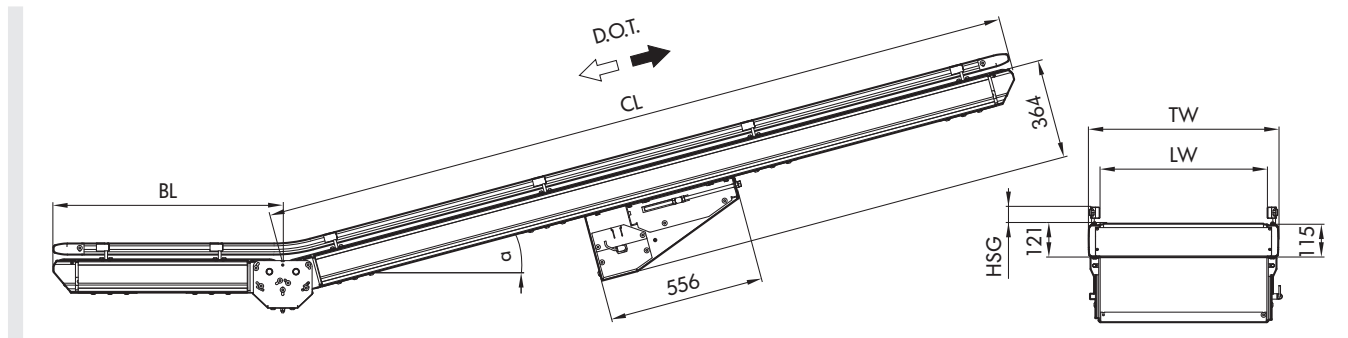

BF	Rated width	420, 620, 840 mm (others on request)
LW	Clear width	BF (+120/-90 mm per side with flexible side guide)
ML	Module length	1500 to 20010 mm
CL	Length of incline or gradient part	ML - BL
BL	Bottom length	720 to 1020 mm
TW	Module width	BF + 80 mm
HSG	Side guide height	35 - 65 mm
$\alpha$	Incline/Decline angle	6°/9°/12°/15°/18°

**BELT CONVEYORS**  
**BM 8433/8443**  
Straight  
Center drive + feed

---

Roller conveyors

**Belt conveyors**

Key products

Accessories