

RollerDrive EC5000 extension cable




The connecting cable of the EC5000 can be extended easily with a plug connection by using the RollerDrive extension cable.

Article number: S-1113897

Technical data

- Temperature range: -30 to +40 °C
- Color: Black
- Length: 2 m
- Outside diameter: 5 mm
- Plug connection: M8 snap-in plug and socket
- Protection rate: IP67 in connected state
- Cross sections: 3 x 0.14 mm² and 2 x 0.5 mm²
- Type designation of the cable: Li9Y11Y
- Bending radius with fixed laying: > 5 * diameter of the cable
- Bending radius with flexible application: > 10 * diameter of the cable
- Properties: Halogen-free, UL-certified cable
- Suitable for drag chains: Yes

Voltage supply flat cable

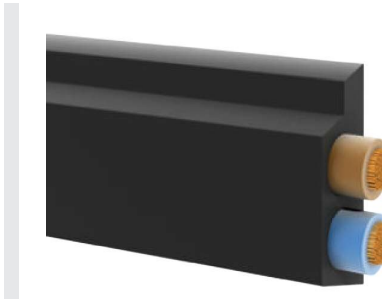

The flat cable is used for the voltage supply of ConveyorControl and MultiControl. The outer contour of the line corresponds to the standard of AS interface. The shell of the line covers holes that were created by piercing contacts. This means that the cable maintains the protection rating even after disconnecting a control.

Article number: S-1004030

Technical data

- Temperature range: -28 to +40 °C
- Strand insulation: Brown for voltage, blue for ground
- Length: 25 m
- Cross section of braids: 2.5 mm²
- Maximum voltage: 60 V DC
- Protection rate: IP54 in contacted state
- Halogen-free

Dimensions

