




## Technical data

<b>General technical data</b>	
Max. load capacity	1000 kg/m or 3000 kg per drive
Conveyor speed	0.1 to 0.5 m/s
Ambient temperature	-28 °C to +45 °C (non-condensing) Note: Deep freeze applications are possible only as an option
Incline/decline	Up to max. 4 % (for certain motor variants only)
<b>Drive</b>	
Rated voltage	400 V
Motor type	Gear motor
Power	0.12 to 0.75 kW
Roller chain	5/8" x 3/8"
<b>Roller</b>	
Roller type	Interroll Series 3950
Roller diameter	89 mm
Sprocket	Z18
Wall thickness of rollers	3 or 5 mm
Material	Steel, zinc-plated
<b>Profile</b>	
Mounting hole pitch	25 mm
Dimensions	200 x 70 x 4 mm
Color	Powder-coated, all RAL colors are possible
Material	Steel

# ROLLER CONVEYOR PM 9710

## Dimensions

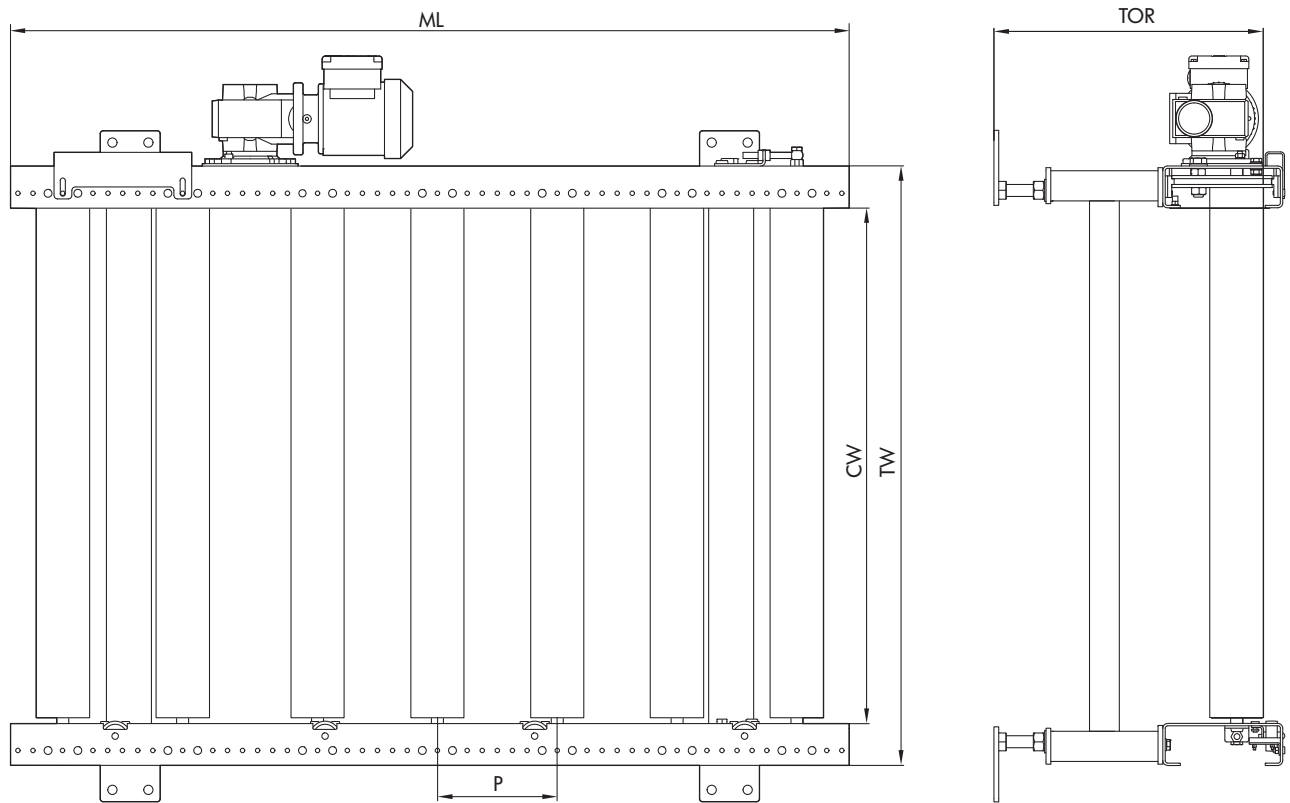

Conveying good width (CGW)	800, 1000, 1200 mm
Module conveying width (CW)	860, 1060, 1260 mm
Module width (TW)	1000, 1200, 1400 mm
Conveying height (TOR)	170 to 1200 mm
Roller pitch (P)	175 to 250 mm
Module length (ML)	750 to 5960 mm

# ROLLER CONVEYOR PM 9710

