




## Technical data

<b>General technical data</b>	
Max. load capacity	1000 kg/m
Conveyor speed	0.1 to 0.5 m/s
Max. stroke height	30 mm
Stop positions	2
Ambient temperature	-28 °C to +45 °C (non-condensing) Note: Deep freeze applications are possible only as an option
Incline/decline	Not suitable
Number of chains	2 or 3
<b>Chain conveyor drive</b>	
Rated voltage	400 V
Motor type	Gear motor
Power	1.1 kW
Roller chain	5/8" x 3/8" duplex with straight bracket joints
<b>Roller conveyor drive</b>	
Rated voltage	400 V
Motor type	Gear motor
Power	0.12 to 0.55 kW
Roller chain	5/8" x 3/8"
<b>Drive stroke</b>	
Rated voltage	400 V
Motor type	Gear motor
Power	0.55 kW
Roller chain	1"
<b>Rollers</b>	
Roller type	Interroll Series 3950
Wall thickness of rollers	3 or 5 mm
Material	Steel, zinc-plated
<b>Profile</b>	
Dimensions	200 x 70 x 4 mm
Color	Powder-coated, all RAL colors are possible
Material	Steel

# CHAIN TRANSFER PM 9730

## Dimensions

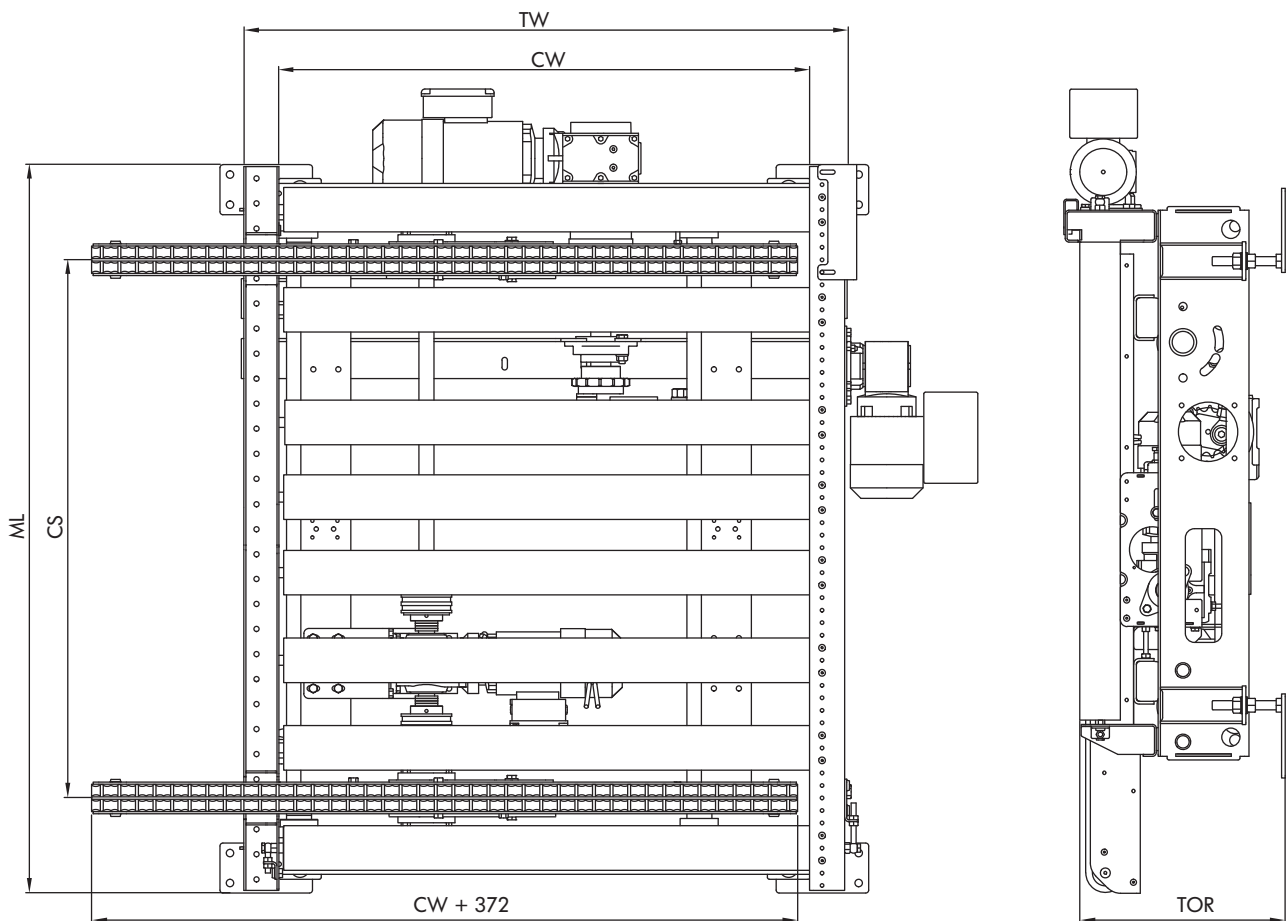

Conveying good width (CGW)	850, 1000, 1200 mm
Module conveying width (CW)	860, 1060, 1260 mm
Module width (TW)	1000, 1200, 1400 mm
Chain spacing (CS)	1075 mm
Conveying height (TOR)	350 to 1200 mm
Module length (ML)	1400 mm