


Technical data

General technical data	
Max. load capacity	1000 kg/m
Conveyor speed	0.1 to 0.5 m/s
Rotational speed (V)	90° in 4 s
Ambient temperature	-28 °C to +45 °C (non-condensing) Note: Deep freeze applications are possible only as an option
Incline/decline	Not suitable
Roller conveyor drive	
Rated voltage	400 V
Power	0.12 to 0.75 kW
Roller chain	5/8" x 3/8"
Turntable drive	
Rated voltage	400 V
Motor type	Gear motor
Power	0.37 kW
Roller chain	5/8" x 3/8"
Rollers	
Roller type	Interroll Series 3950
Roller diameter	89 mm
Sprocket	Z18
Wall thickness of rollers	3 or 5 mm
Material	Steel, zinc-plated
Profile	
Dimensions	200 x 70 x 4 mm
Color	Powder-coated, all RAL colors are possible
Material	Steel

TURNTABLE PM 9735

Dimensions

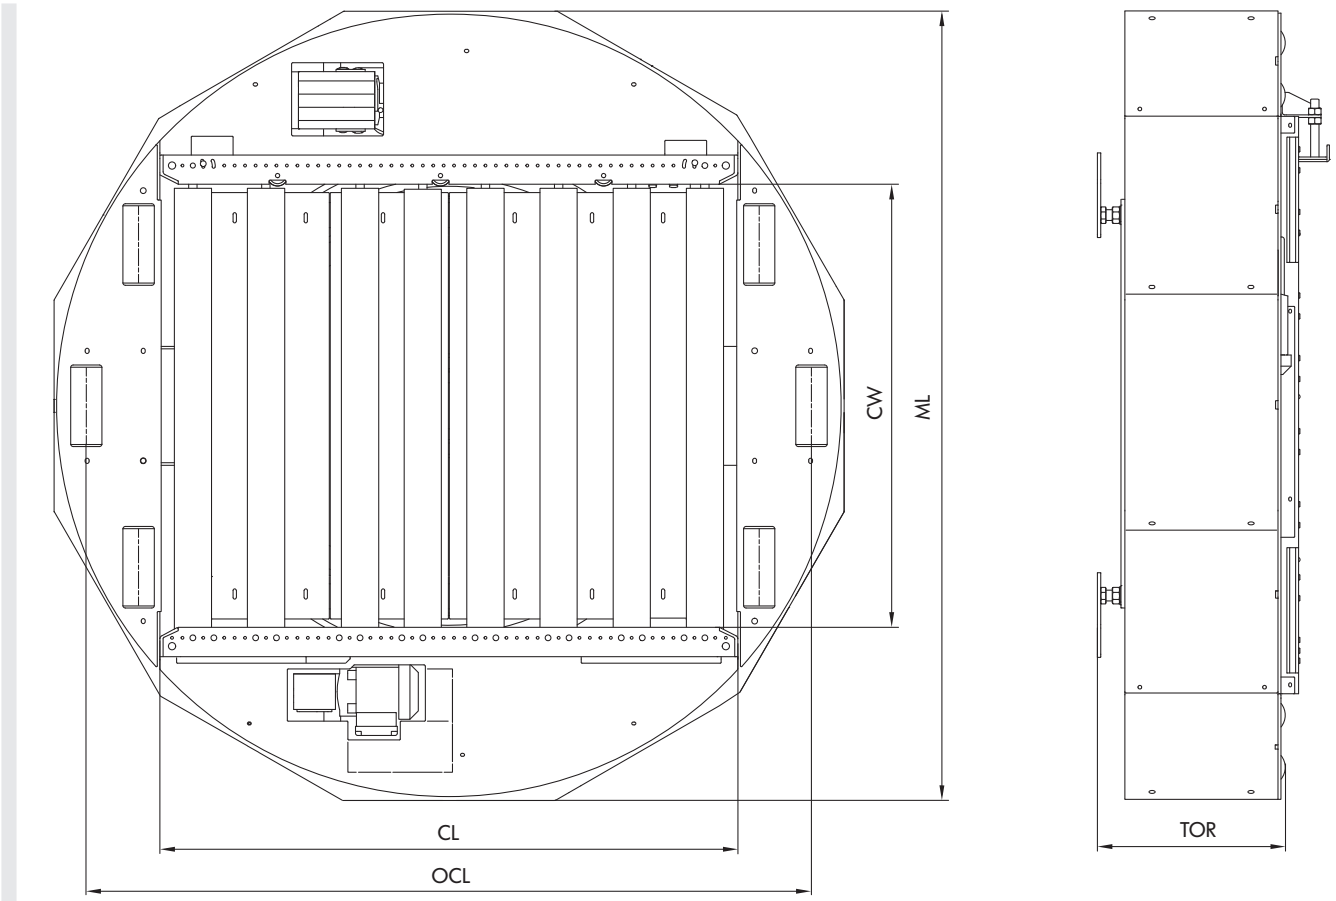

Conveying good width (CGW)	800, 1000 mm
Module conveying width (CW)	1060 mm
Conveying height (TOR)	350 to 1200 mm
Conveyor length (CL)	1380 mm
Overall conveyor length (OCL)	1740 mm
Module length (ML)	1890 mm