

ROLLER CONVEYORS

RM 8140

Omni-wheel table

Not powered



24V

48V

400V




Product description

The omni-wheel table with multi-directional wheels is particularly well suited for workstation and inspection areas and for materials with soft bottoms that can be moved in all directions with very little force.

Scope of delivery

- The module is partially assembled; the side guides are enclosed separately
- Please order supports and end caps separately

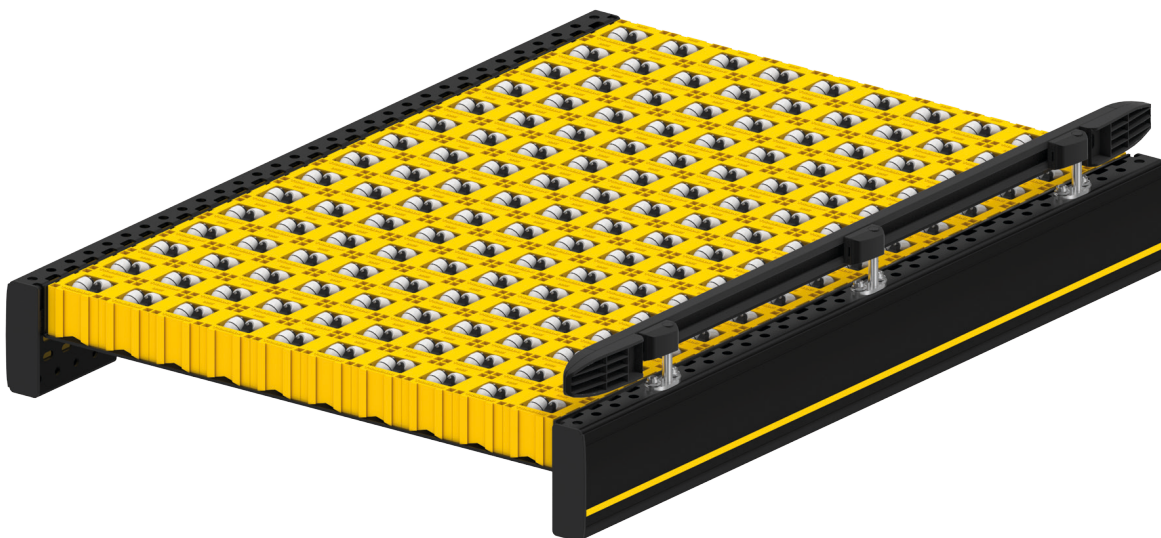


ROLLER CONVEYORS RM 8140

Omni-wheel table
Not powered

Technical data

General technical data	
Max. load capacity	60 kg/m
Incline/decline	Not suitable
Ambient temperature	-5 to +40 °C
Roller	
Roller type	Interroll Series 2800
Roller diameter	48 mm
Roller material	Polyamide, polypropylene housing

Dimensions

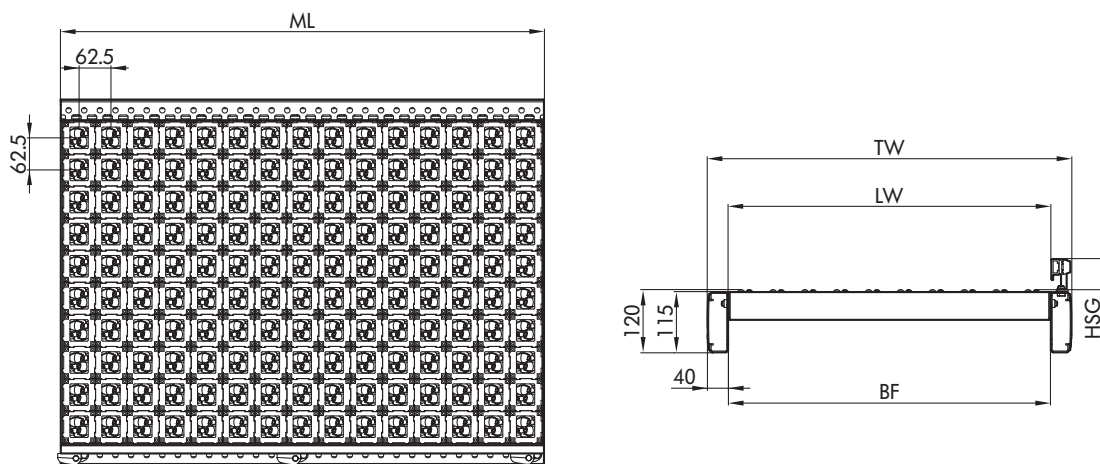

BF	Rated width	420, 620, 840 mm (others on request)
LW	Clear width	BF (+120/-90 mm per side with flexible side guide)
ML	Module length	Max. 2160 mm
TW	Module width	BF + 80 mm
P	Pitch	62.5 mm
HSG	Side guide height	68 mm (standard), adjustable from 35 – 80 mm with fixed holders