

## KEY PRODUCTS

### RM 8830

Lift-Up Gate



24V

48V

400V



#### Product description

The lift-up gate swivels upward to provide a walkway, or access from one side of the conveyor to the other. This allows access to the rear of the conveyor, and the ability to plan quicker escape routes, in case of an emergency. The pivoting movement is operated by an innovative rotary mechanism.

#### Scope of delivery

- Please order fitted conveyor module separately
- The module is fully assembled



# KEY PRODUCTS

## RM 8830


### Lift-Up Gate

## Technical data

General technical data	
Max. load capacity*	100 kg (incl. fitted module)
Ambient temperature	-5 to +40 °C
Incline/decline	Not suitable

\*The combination of maximum values is not always possible.

## Dimensions

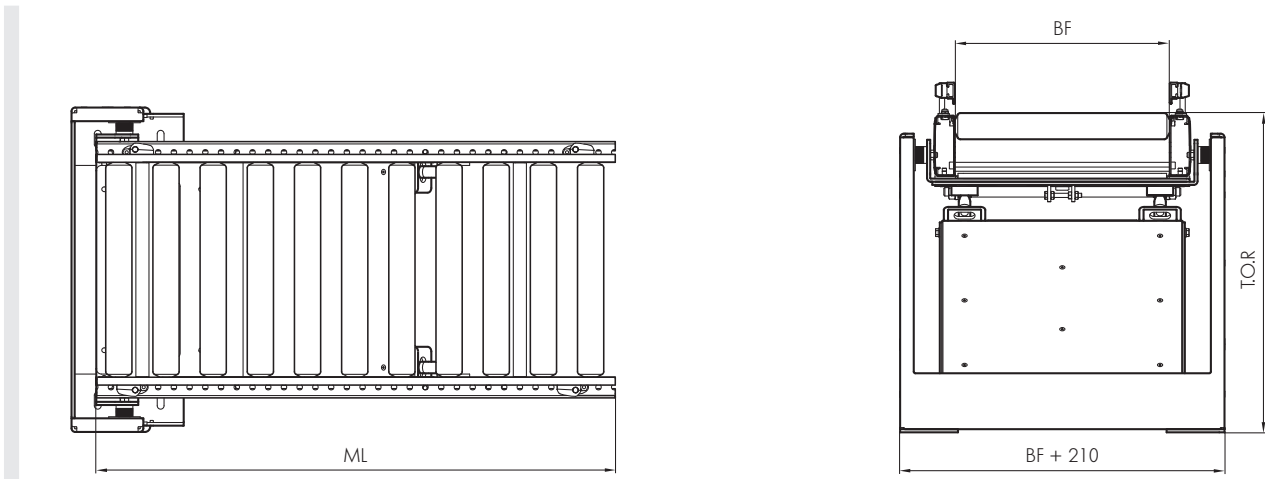

BF	Rated width	420, 620, 840 mm (others on request)
T.O.R.	Min. height of top edge of roller	645 mm
ML	Module length	1020 to 1680 mm
	Channel width	ML - 240 mm